19" Native 4:3 LED Display

Eco-Friendly and Performance Enhancing

VA926-LED

The 19" ViewSonic® VA926-LED monitor delivers reliability, performance and simplicity for users who prefer a standard 4:3 aspect ratio display and a native resolution of 1280x1024. The VA926-LED features DVI and analog dual inputs to ensure seamless compatibility with the installed base of VGA-output sources as well as pure digital DVI connectivity. It also incorporates 10,000,000:1 MEGA Dynamic Contrast Ratio and ENERGY STAR® certification for crystal clear images and reduced power consumption. With additional features such as ViewSonic OnView® control interface with Power / OSD lock, sRGB color management and VESA compatible wall mount, the VA926-LED offers solid dependability and elegant design. These core features and brilliant color performance, make the eco-friendly VA926-LED just right for routine office applications.

Eco-Mode Conserves More Energy

ViewSonic's proprietary Eco-mode function is built into all LED displays, offering options to "Optimize (85%)" or "Conserve (65%)". Both modes reduce display brightness and conserve up to 30%* energy. Especially in a low ambient light, Eco-mode adjusts brightness and improves visibility while reducing eye fatigue and prolonging the display's lamp life. With Eco-mode, lamp replacement expenditures are reduced while practicing eco-friendliness.

10,000,000:1 MEGA Dynamic Contrast Ratio

Dynamic contrast ratio defines a differentiating relationship between darkest and brightest colors when reproducing an image. With dynamic contrast ratio, VA926-LED is capable of automatically detecting the brightness and darkness of an image and adjusts the LED backlight accordingly. It maximizes grayscale and color ranges and boosts contrast ratio to an ultrahigh 10,000,000:1, resulting in rich, vibrant visuals.

Normal | Dynamic Contrast Ratio

ViewSonic®
See the difference®

19" Native 4:3 LED Display

VA926-LED

Planet-Friendly Mercury-Free LED Backlighting

LED backlighting enhances display performance, delivers an outstanding color range, and adjusts contrast ratios for remarkably detailed images. The LED backlighting further conserves up to 30%* more energy when compared to conventional displays to allow a slimmer profile and a most pleasing entertainment experience.

The VA926-LED is Perfect for:

- Small Office / Home Office
- Government / Education
- Corporations
- Web Surfing

Reviving Color with sRGB Color CorrectionTechnology

Accurate and consistent color performance is essential for professionals in graphic design, video editing, and other professional environments. With built-in sRGB color correction technologies, the VA926-LED series reproduces 100% sRGB rich color performance and captures images in their original and true colors.

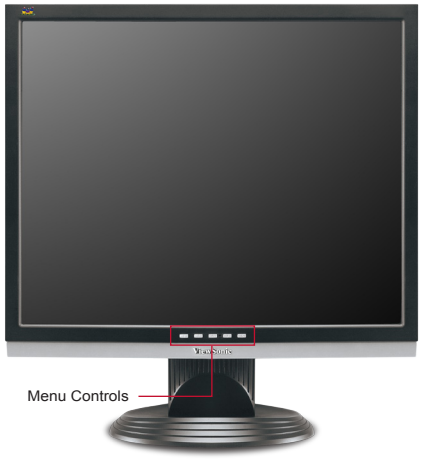

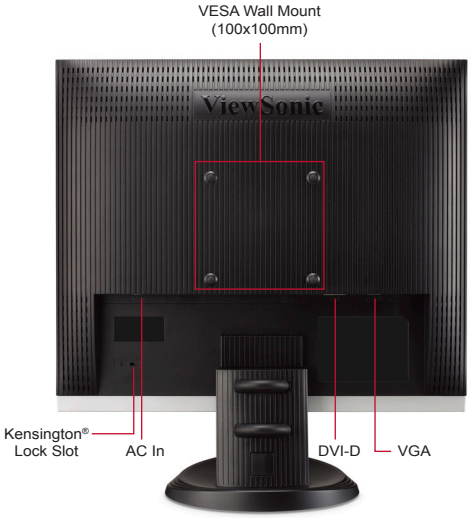

Specifications

LCD PANEL	Type	19" Wide Color TFT Active Matrix LED
	Display Area	14.8" horizontal x 11.9" vertical; 19" diagonal
	Optimum Resolution	1280x1024
	Brightness	250 cd/m² (typ.)
	Contrast Ratio	1000:1 (typ.)
	Dynamic Contrast Ratio	10,000,000:1
	Viewing Angles	170° horizontal, 160° vertical
	Response Time	5ms (typ)
	Backlight	White-light LED
	Backlight Life	30,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
VIDEO INPUT	Analog	RGB analog (0.7 / 1.0 Vp-p, 75 ohms)
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync
COMPATIBILITY	PC	PC compatibles (VGA up to 1280x1024 non-interlaced)
	Mac®	Up to 1280x1024
CONNECTOR	Video Analog	15-pin mini D-sub (VGA)
	Digital	DVI-D
	Power	Internal Power Board, 3-pin plub (CEE22)
POWER	Voltage	AC 100–240V (universal), 50 / 60Hz
	Consumption	18W (typ)
	Optimize	16W (typ)
	Conserve	12W (typ)
CONTROLS	Front Panel Buttons	Power, 1, up, down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Color Adjust (sRGB, Bluish, Cool, Native, Warm, User Color [R,G,B]), Information, Manual Image Adjust (H/V Position, Horizontal Size, Fine Tune, Sharpness, Dynamic Contrast, Aspect Ratio, Eco-mode), Setup Menu (Language Select, Resolution Notice, OSD Position, OSD Timeout, OSD Background, Auto Power Off, Power Indicator), Memory Recall

ERGONOMICS	Tilt	Forward 5°, Back 20°
OPERATING CONDITIONS	Temperature	32–104° F (0–40° C)
	Humidity	10–90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	16.2 x 17.1 x 7.7 in. / 412.2 x 434.9 x 195 mm
	Physical without Stand	16.2 x 14.0 x 2.5 in. / 412.2 x 354.9 x 63.8 mm
	Packaging	18.5 x 20.1 x 5.5 in. / 470 x 510 x 140 mm
WEIGHT	Net with Stand	7.7 lb. / 3.5 kg
	Net without Stand	6.9 lb. / 3.1 kg
	Gross	10.8 lb. / 4.9 kg
WALL MOUNT	VESA	100x100 mm
REGULATIONS		CE,CB, UL, cUL, FCC-B / ICES-003B, WEEE, RoHS, ENERGY STAR®,REACH SVHC List, TCO 5.0
RECYCLE / DISPOSAL		Please dispose of in accordance with local, state or federal laws.
POWER MANAGEMENT		ENERGY STAR® standards
WARRANTY		Three-year limited warranty on parts, labor and backlight.

What's in the box?

VA926-LED display, power cable, VGA cable, Quick Start Guide, ViewSonic Wizard CD (available in some countries only)

10,000,000:1 MEGA Dynamic Contrast Ratio

3year warranty

ENERGY STAR

Eco mode

TUV NORD ISO 9001 : 2008

TUV NORD ISO 14001 : 2004

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

***Energy savings may vary based on cost, actual usage and other factors.** Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2012 ViewSonic Corporation. All rights reserved. [16406-00B-10/12] VA926-LED